New Sydney Fish Market



Community update

December 2022

11kV Feeder Power Upgrade

The NSW Government is delivering a new Sydney Fish Market which will retain its authentic experience and strengthen its position as one of Australia's leading tourist destinations.

Multiplex is currently undertaking works to upgrade the power supply for the new Sydney Fish Market. This work involves trenching and installing conduit and cabling along a 1.8km route from Lyons Road in Camperdown to the site in Bridge Road, Glebe.

man

Key dates
January 2023
Location
Bridge Road, Glebe

Upcoming works - January 2023

Conduit Installation - Intersection of Lyons Rd & Bridge Rd

Works will be undertaken during January at the intersection of Bridge Road and Lyons Road involving saw cutting the top layer of pavement, followed by trenching, duct installation and temporary pavement restoration.

As this is a busy intersection, with multiple underground services as well as overhead powerlines and traffic lights, the work is required to be undertaken in a continuous shift over 2 days and 2 nights.

Traffic access will be maintained during this work, with one lane in operation using a stop/slow traffic control setup.

Precast Pit Installations - Bridge Road

Works will be undertaken during January to install three pre-cast concrete pits in Bridge Road along the 11kV route (see map). Each installation will be undertaken over a 2 day and 2 night continuous shift involving saw cutting the top layer of pavement, excavation of a section of the road, lifting the precast concrete pit into place with a mobile crane, followed by finalisation works.

There will be detours in place at times, with access maintained for local traffic.

What to expect

The work zone will be clearly delineated, with traffic diversions in place to safely guide vehicles, cyclists, and pedestrians around the work zone. During the pit installations, detours will be necessary at times, with local traffic access maintained.

Regular traffic conditions and pedestrian access will be restored at the conclusion of the work.

Bus routes will be maintained with limited relocation of bus stops around work zones when necessary.

Some kerbside parking spaces may be unavailable during the work however driveway access will be maintained.






Works schedule

Dates	Start/Finish Times	Work undertaken
5-6 January	7am Thu 5 th - 7am Sat 7 th Jan	Pit 2 installation near Jarocin Avenue Pit 3 installation near Rosebank Street
7-8 January	7am Sat 7 th - 7am Mon 9 th Jan	Conduit works cnr Lyons & Bridge Roads
14-15 January	7am Sat 14 th - 7am Mon 16 th Jan	Pit 1 installation near Foss Street

The work has been scheduled during January to minimise disruption. Please note work schedules may change due to weather, conditions, and authority approvals.

Location of Work

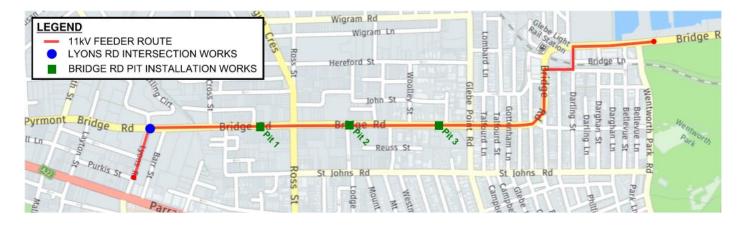

We understand the impacts this critical work may cause and thank you for your understanding.

More information

We are committed to keeping you informed and regular updates will be provided.

Contact us for construction related questions, feedback or complaints:

🗘 1800 271 114 💩 nsfm.community@multiplex.global 🖳 insw.com/newsydneyfishmarket