

Western Harbour Tunnel

Work notification | Tunnelling update North Sydney and Waverton

November 2025





We acknowledge the Traditional Custodians of the Country on which Western Harbour Tunnel is being constructed, including the Gadigal, Cammeraygal, and Wangal peoples, as well as the Aboriginal peoples of Emu Plains, and we pay respect to Elders past and present.

Tunnelling in North Sydney is progressing well with tunnelling activities continuing in the Falcon Street off ramp, Berry Street on ramp and mainline tunnels.

What work are we doing?

In **November 2025**, we will continue tunnel fit out activities in the Falcon Street off ramp, Berry Street on ramp and mainline tunnels between Warringah Freeway and Edward Street, North Sydney. Benching excavation will take place in sections of tunnel west of Pacific Highway, North Sydney and Waverton, and heading excavation and stabilisation / rockbolting activities are continuing between Pacific Highway and Larkin Street, Waverton.

A map showing the current approximate location of tunnelling activities throughout November is provided overleaf.

We are approved to carry out tunnelling activities **24 hours a day, seven days a week**.

We are completing the tunnels in phases. Below are the activities that need to be carried out to make the tunnels operational:

- **Phase 1 – heading excavation** which involves excavating the top of the tunnel and cross passages and stabilising the tunnel by installing large steel rods (rock bolts) into the rock layer and spraying concrete (shotcreting).
- **Phase 2 – benching excavation** which involves excavating the floor of the tunnel.
- **Phase 3 – tunnel fit out** which involves installing drainage and other mechanical and

electrical services to the new tunnel. Additional excavation activities are required to complete drainage and service installation work. **Some of this work involves high noise impact activities.**

- **Phase 4 – tunnel pavement and structural work** which involves installing the road pavement, signage, line marking and barriers in the tunnel, and structural fit out of the cross passages (linking the tunnels together).


Note: during each phase of tunnelling, hammering may be required. This is an approved tunnelling activity.

What will this mean for you?

Some residents and businesses along the tunnel alignment may experience ground-borne noise and vibration when tunnelling activities are being carried out. Each individual’s experience will vary due to a range of factors such as a property’s distance to the tunnel, ground conditions, building types, existing background noise, and materials used to build your property.

	Where Between Warringah Freeway in North Sydney and Larkin Street, Waverton
	When Throughout November 2025
	Hours of operation 24 hours a day, seven days a week

Location of work area

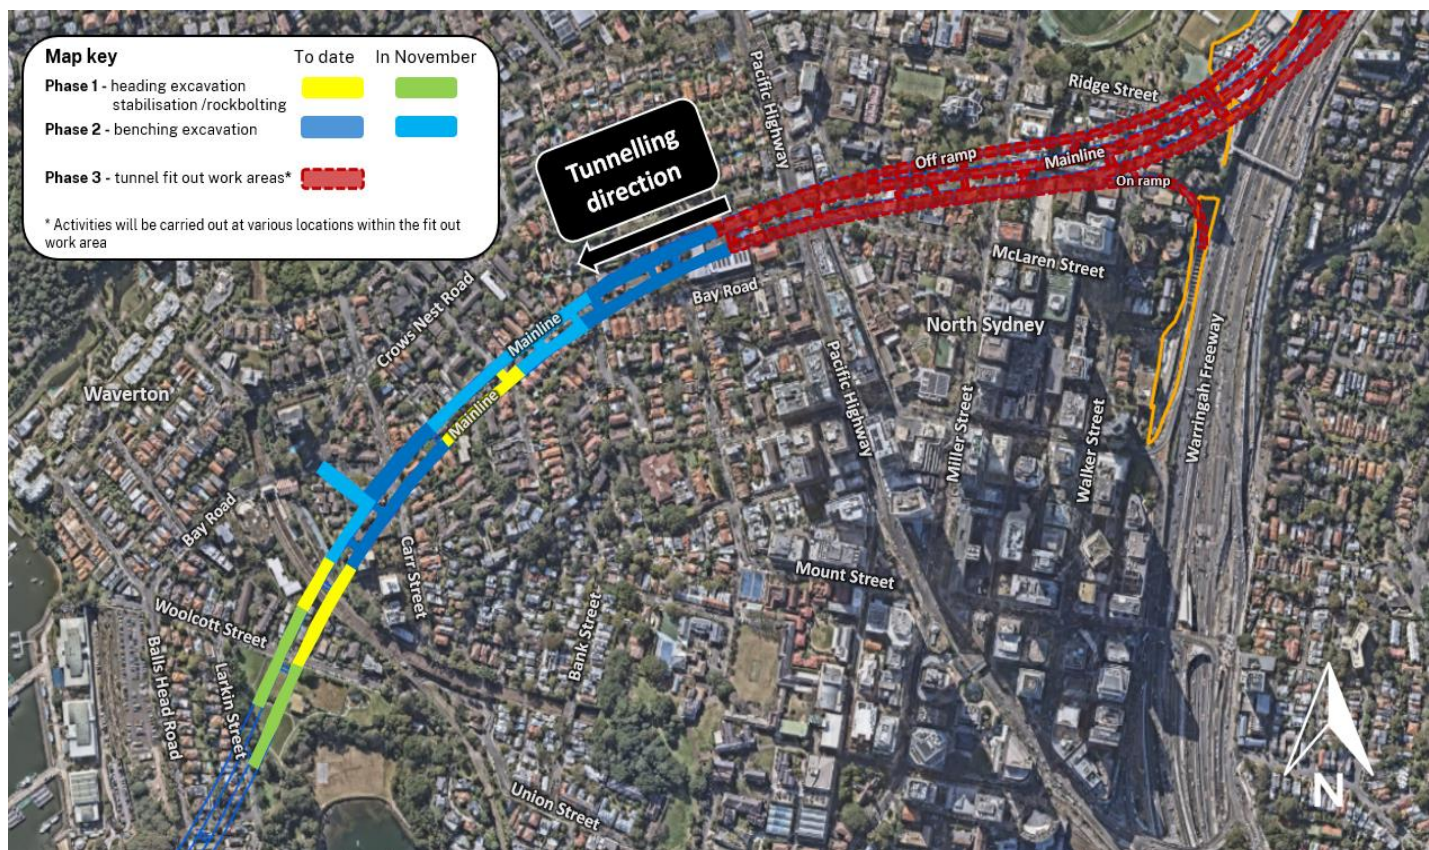

For noise management tips and further information on ground-borne noise and vibration, please visit our website using the QR code.



Contact us



Project Infoline **1800 931 189**



whtbl@transport.nsw.gov.au



Visit our website at
nswroads.work/whtportal



Western Harbour Tunnel Stage 2
PO Box 537, North Sydney,
New South Wales 2059, Australia



Interpreter service

For languages other than English call **131 450**
Arabic • Greek • Hindi • Mandarin • Vietnamese

لطلب خدمة الترجمة الشفهية للغات غير الإنجليزية اتصل
بالرقم **131 450**

Για υπηρεσίες διερμηνείας σε άλλες γλώσσες εκτός από
τα Αγγλικά καλέστε το **131 450**

अंग्रेज़ी के अतिरिक्त अन्य भाषाओं के लिए दुभाषिया सेवा
131 450 पर कॉल करें

获取英语以外的其他语言口译协助服务可以致电**131 450**

Để có dịch vụ thông ngôn cho các ngôn ngữ khác tiếng
Anh, gọi số **131 450**

www.transport.nsw.gov.au/privacy-statement#Your_Privacy